

MasterSheet

050 0032
Revision 11/24/09



Complete Car Audio
Installation Instructions
CRUTCHFIELD®

IMPORTANT

Before starting, compare items on your invoice with items received. Carefully check through packaging material. If any item is missing, please call **Crutchfield Technical Support** at **1-800-955-9094**.

2008- Subaru Impreza








Although reasonable attempts are made to verify the accuracy of the information contained in this MasterSheet, it is presented without warranties or guarantees of any type due to the constantly changing nature of this type of information and running changes in vehicle production. Any person or entity using this information does so at his or its own risk. If you find our instructions are different from your vehicle, or if you have questions, do not continue with your installation. Contact our toll-free technical support for assistance.



0000500032

Inside...

Page

2	Factory Radio Removal	✓		✓		
3	Receiver Installation*	✓				
4-5	Front Door Speakers	✓	✓	✓	✓	✓
6-7	Rear Door Speakers	✓	✓	✓	✓	✓
		Phillips Screwdriver	Small Flat Blade Screwdriver	Panel Tool	Drill & 1/8" Bit	Crimp Tool
Tools Required ▶						

* If you need additional wiring information, visit us online at www.crutchfield.com/support/faq.html

Note: At this time, no aftermarket antenna is available from Crutchfield. A replacement antenna may be purchased from a local dealership.

CRUTCHFIELD®
CRUTCHFIELD.COM

Copyright 2009 Crutchfield Corporation

050 0032

Factory Radio Removal

1. Eject and remove all discs from factory radio.
2. Set parking brake and disconnect negative battery cable to prevent any electrical short.
3. Starting at the lower corners, pry out receiver trimpanel to release ten (10) clips and remove panel (Figures 1 & 2).
4. Remove four (4) phillips screws securing factory radio. Pull out radio, disconnect and remove (Figure 3).



050 0032

Receiver Installation

Note: A standard DIN unit installation is shown. A Double DIN receiver may also be installed following these same instructions.

1. Secure receiver to mounting bracket following instructions supplied with the installation kit.
2. Make wiring connections following instructions supplied with the wiring adaptor received from Crutchfield.
3. Hold receiver assembly near dash. Connect wiring adaptor to vehicle harness and plug antenna lead into rear of receiver.
4. Slide assembly into dash and secure with screws previously removed.
5. Test operation and reassemble dash by reversing removal steps.

NOTES:

Please read first

- Inspect factory receiver harness connector in vehicle. Ensure that the wiring adaptor received from Crutchfield plugs into the vehicle's connector. If the connector is missing or incorrect, please call our **Technical Support Department** at **1-800-955-9094**.



1-800-955-9094
TECHNICAL SUPPORT

CRUTCHFIELD[®]
CRUTCHFIELD.COM

Copyright 2009 Crutchfield Corporation 3

050 0032

Front Door Speakers

NOTES:

Please read first

- Instructions show factory size speakers or speakers with adaptor brackets only. Cutting or fabricating (not shown) will be required for other speaker sizes.




IMPORTANT

It will be necessary to fabricate a speaker mounting bracket in order to install an aftermarket tweeter. It may also be necessary to acquire additional hardware.

1. Starting at the top corner, pull "sail" panel away from door to release one (1) clip. Disconnect wiring harness (if equipped with factory tweeter). Remove "sail" (Figure 1).
2. Pry open screw cover behind door release and remove one (1) exposed phillips screw (Figure 2).
3. Pry open screw cover inside door pull cup and remove one (1) exposed phillips screw (Figure 3).
4. Pry up power options switch panel using the pry point at the front edge of the panel. Disconnect wiring harnesses and remove (Figure 4).
5. Remove two (2) phillips screws exposed by removal of power options switch panel (Figure 5).

Continued on the next page.

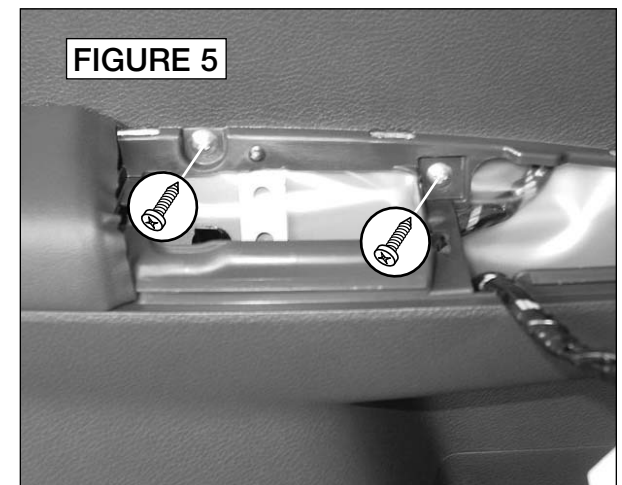

1-800-955-9094
TECHNICAL SUPPORT

CRUTCHFIELD[®]
CRUTCHFIELD.COM

Copyright 2009 Crutchfield Corporation

050 0032

Front Door Speakers (continued)

6. Pry out sides and bottom of door panel to release clips. Disconnect door lock and release cables. Remove door panel (Figures 6 & 7).

7a. "Sail" Tweeter Removal and Installation:

- Remove two (2) phillips screws securing speaker (Figure 8).
- No speaker wiring adaptor is available at this time from Crutchfield. Clip wires behind speaker to remove.
- Fabricate a speaker mounting bracket.
- Use spade connectors for speaker connections.
- Secure speaker to "sail" panel.



7b. Woofer/Tweeter Speaker Removal & Installation:

- Remove six (6) phillips screws securing dual speaker assembly. Pull out assembly, disconnect and remove (Figure 9).
- Connect speaker wiring adaptor of replacement speaker to vehicle speaker harness.
- Secure new speaker with screws previously removed.

7c. Standard Speaker Removal and Installation:

- Remove three (3) phillips screws securing speaker/bracket assembly. Pull out speaker, disconnect and remove (Figure 10).
- Secure new speaker to adaptor bracket following instructions supplied with brackets.
- Place speaker/bracket assembly in location and use as a template to mark new mounting holes. Remove assembly and drill holes with a 1/8" bit.
- Connect speaker wiring adaptor of replacement speaker to vehicle speaker harness.
- Secure speaker/bracket assembly with screws supplied.

8. Test speaker operation and reinstall door panel by reversing disassembly steps.

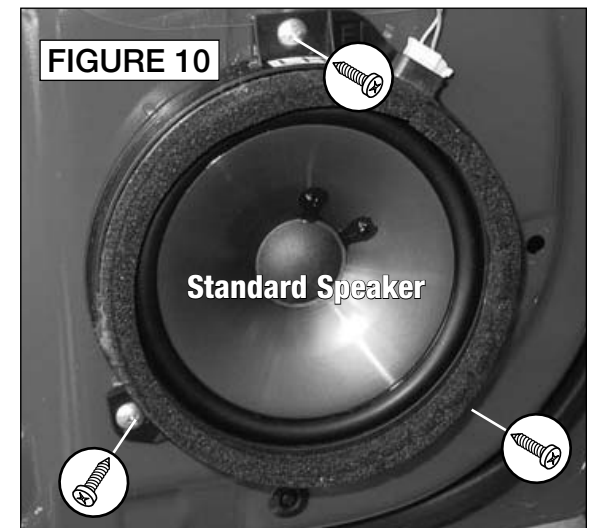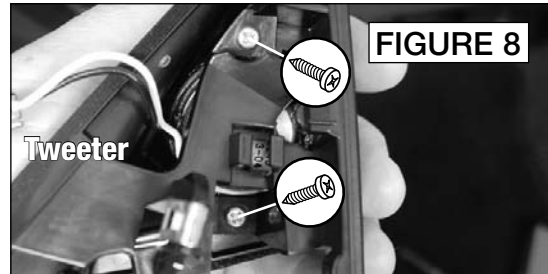

 **SAFETY CHECK**

- Check that wires do not interfere with window operation.
- Test door lock and release operation.

Rear Door Speakers



IMPORTANT

It will be necessary to fabricate a speaker mounting bracket in order to install an aftermarket tweeter. It may also be necessary to acquire additional hardware.

1. Starting at the top corner, pull “sail” panel away from door to release one (1) clip. Remove “sail” (Figure 1).
2. Pry open screw cover behind door release and remove one (1) exposed phillips screw (Figure 2).
3. Pry open screw cover inside door pull cup and remove one (1) exposed phillips screw (Figure 3).
4. Pry up power options switch panel using the pry point at the front edge of the panel. Disconnect wiring harness and remove (Figure 4).
5. Remove two (2) phillips screws exposed by removal of power options switch panel (Figure 5).


Continued on the next page.



NOTES:

Please read first

- Instructions show factory size speakers or speakers with adaptor brackets only. Cutting or fabricating (not shown) will be required for other speaker sizes.

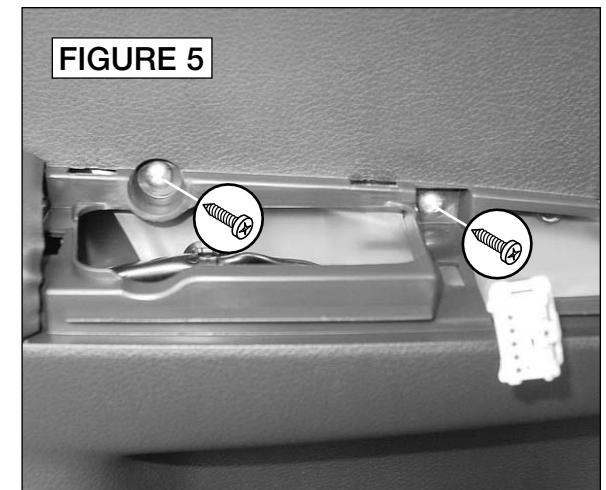

1-800-955-9094
TECHNICAL SUPPORT

CRUTCHFIELD[®]
CRUTCHFIELD.COM

Copyright 2009 Crutchfield Corporation 6

Rear Door Speakers (continued)

6. Pry out sides and bottom of door panel to release clip. Disconnect door lock and release cables. Remove door panel (Figures 6 & 7).




7a. Woofer/Tweeter Speaker Removal & Installation:

- Remove six (6) phillips screws securing dual speaker assembly. Pull out assembly, disconnect and remove (Figure 8).
- Connect speaker wiring adaptor of replacement speaker to vehicle speaker harness.
- Secure new speaker with screws previously removed.

7b. Standard Speaker Removal and Installation:

- Remove three (3) phillips screws securing speaker/bracket assembly. Pull out speaker, disconnect and remove (Figure 9).
- Secure new speaker to adaptor bracket following instructions supplied with brackets.
- Place speaker/bracket assembly in location and use as a template to mark new mounting holes. Remove assembly and drill holes with a 1/8" bit.
- Connect speaker wiring adaptor of replacement speaker to vehicle speaker harness.
- Secure speaker/bracket assembly with screws previously removed.

8. Test speaker operation and reinstall door panel by reversing disassembly steps.

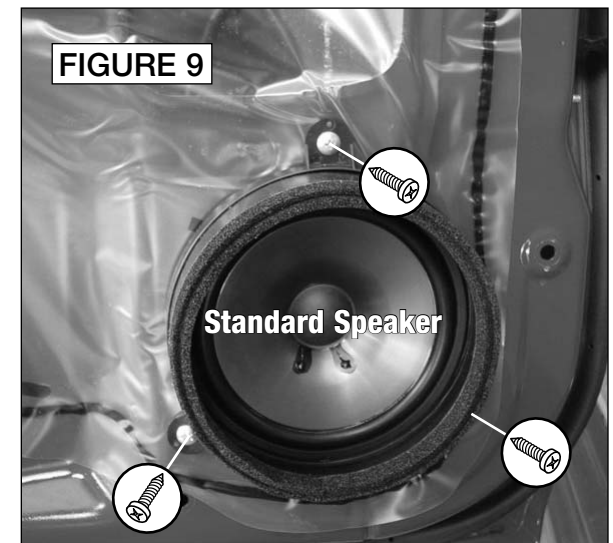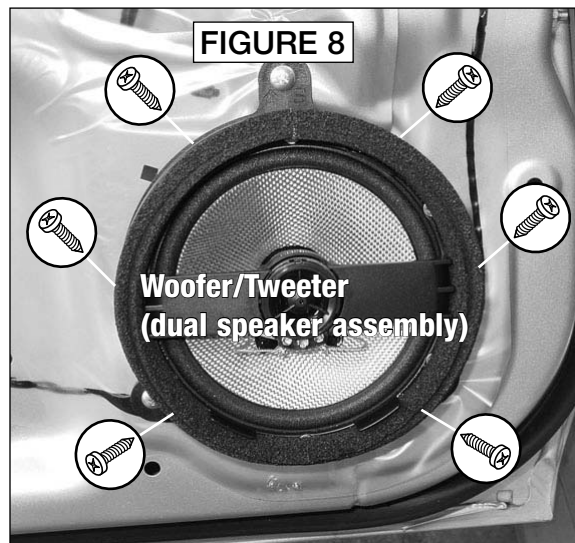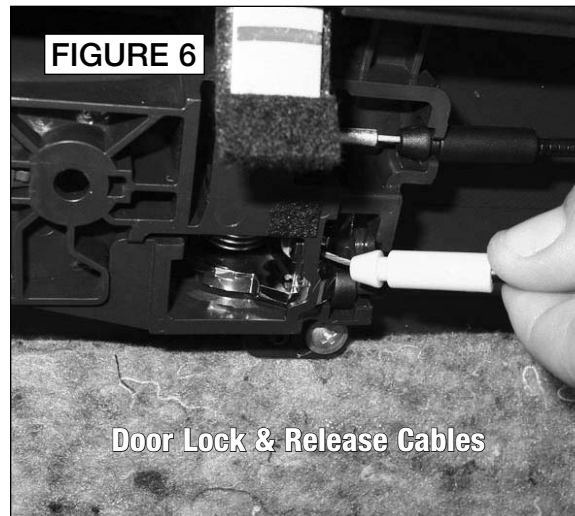

SAFETY CHECK

- Check that wires do not interfere with window operation.
- Test door lock and release operation.



1-800-955-9094
TECHNICAL SUPPORT

CRUTCHFIELD[®]
CRUTCHFIELD.COM

Copyright 2009 Crutchfield Corporation 7